




Parking / Planning data

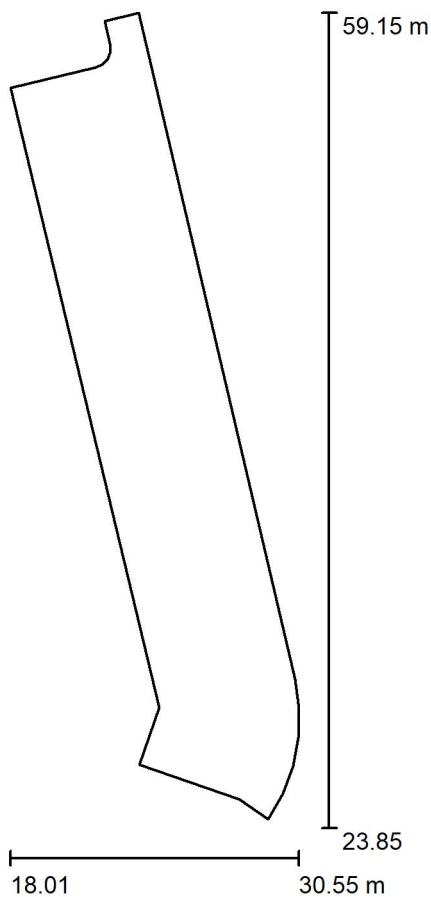


Maintenance factor: 0.80, ULR (Upward Light Ratio): 0.0%

Scale 1:328

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	3	PHILIPS 910925866692 BGP282 T35 LED80-4S/740 PSD DM11 FG (1.000)	6984	8000	46.3
Total:			20951	24000	138.8

Parking / Ground Element 1 / Surface 1 / Isolines (E)

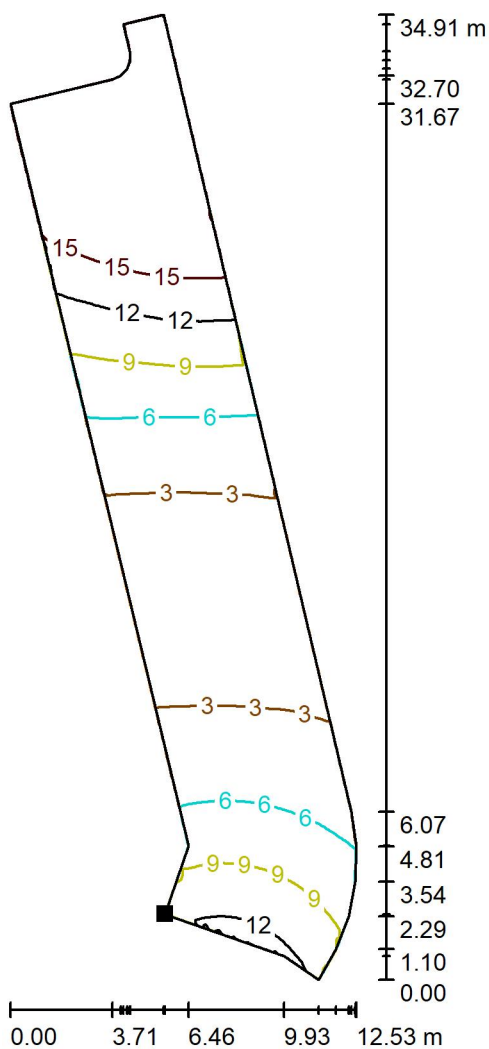

Values in Lux, Scale 1 : 274

Position of surface in external scene:
Marked point:
(23.626 m, 26.611 m, 0.000 m)

Grid: 128 x 64 Points

E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0	E_{min} / E_{max}
9.44	1.87	28	0.198	0.066